

# Dayscreen 5%

## External Screens & Awnings



**Application:** • External Screens and Awnings

**Characteristics:** • Width: 2200mm (\*selected colours) | 2750mm | 3200mm

**Technical:**


- Composition: 30% Polyester | 70% PVC
- Basketweave: 2x2
- Openness Factor: 5%
- Nominal Thickness ISO 2286-3: 0.82 mm +/- 5%
- Nominal Weight ISO 2286-2: 605 gsm +/- 5%
- Light Fastness: 6 (Bluescale) Tested to EN ISO 105
- Formaldehyde Free | Lead Free | Phthalate Free | VOC free
- Yarn Count ISO 7211/2: Warp 36 +/--% per 25.4mm | Weft 31 +/--% per 25.4mm
- Breaking Strength ISO 1421 Warp: 223 daN/5cm | Weft: 201 daN/5cm
- Tear Strength ISO 4674 Warp: 14.9 daN | Weft 11.8 daN
- Colour Fastness to Light ISO 105: B04: 8
- Mould Resistance ISO 846: A and B
- Printable

**Protection:**


- Fire Classification: Tested to NFPA 701 – 2010 (FR-USA) | DIN 4102 – 1 (B1 – DE)
- Greenguard and Greenguard Gold Accredited
- Oeko-Tex Certified
- UV Resistant
- Manufactured in accordance with: Management Quality System ISO 9001
- Manufactured in accordance with: Environmental Management System ISO 14001

**Warranty:** • 10 Years

### Colour Range \*

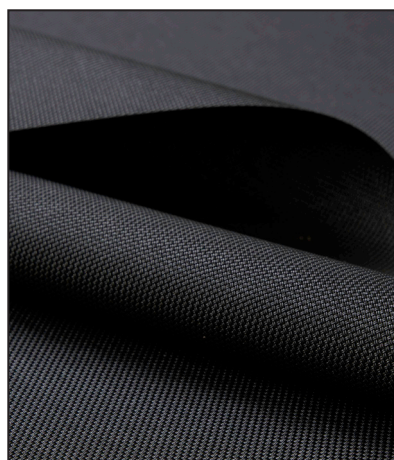

Dayscreen 5%

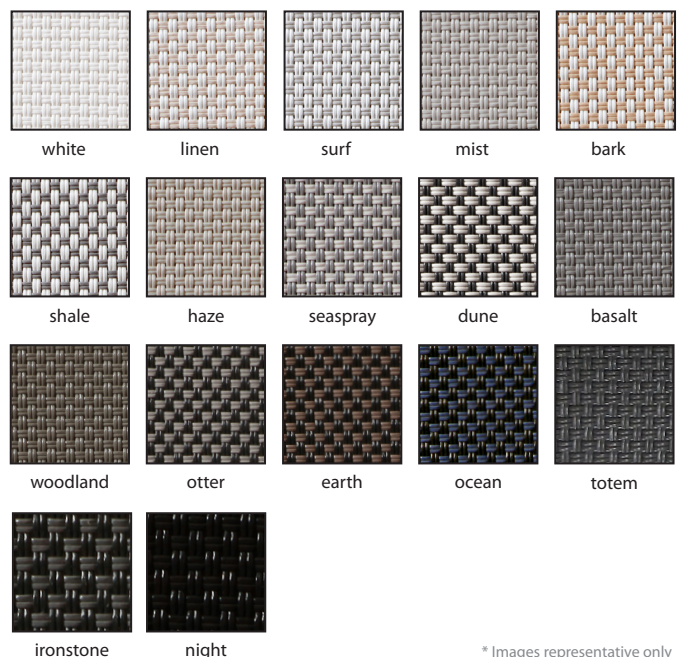

\* Images representative only